


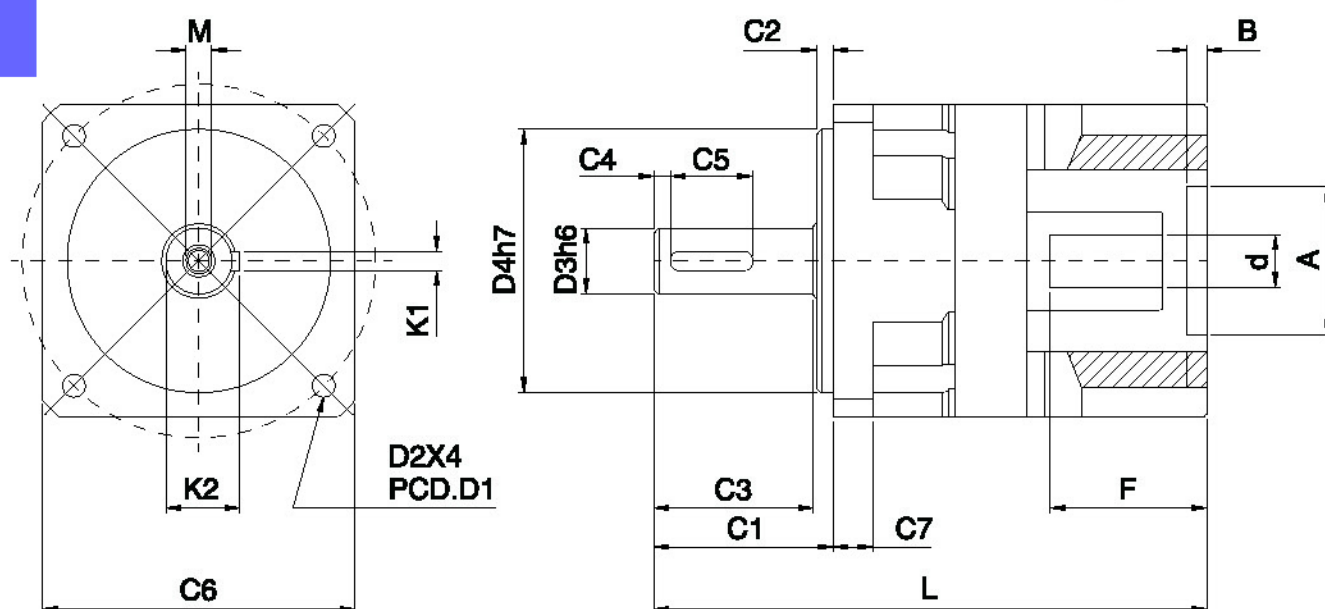

Info.	DH042	DH060	DH090	DH120	DH150
D1	50.0	70.0	105	130	165
D2	4.20	5.20	6.50	8.50	10.5
*D3	12 (08~12)	16 (12~16)	20 (18~22)	32 (24~35)	42 (38~45)
D4	35.0	50.0	80.0	110	130
C1	24.0	35.0	55.0	58.0	74.0
C2	4.00	7.00	5.00	5.00	4.00
C3	20.0	27.0	49.0	52.0	67.0
C4	3.00	3.00	5.00	5.00	5.00
C5	12.0	20.0	25.0	40.0	45.0
C6	42.0	62.0	95.0	115	145
C7	8.00	9.60	10.0	19.0	23.5
L	L1	92	116	175	261
	L2	105	135	200	313
M	M4*P0.7*08	M5*P0.8*12	M6*P1.5*12	M8*P1.25*27	M12*P1.25*32
K1	4.00	5.00	6.00	10.0	12.0
K2	14.3	18.0	22.5	35.1	45.0
d	≤ 8.00	≤ 14.0	≤ 24.0	≤ 28.0	≤ 42.0
A	30	30~50	50~80	55~110	95~130
B	4.00	4.00	8.00	5.00	10.0
F	≤ 25.0	≤ 30.00	≤ 40.0	≤ 47.5	≤ 66.5

Műszaki adatok

Megnevezés	Fokozat	Áttétel	DH042	DH060	DH090	DH120	DH150
Kimenő nyomaték (Nm)	1	3	30	40	140	260	476
		4	48	60	168	306	560
		5	45	55	155	292	536
		7	40	50	166	285	520
		10	30	40	140	260	476
	2	9	30	40	140	260	476
		12	30	40	140	260	476
		15	48	60	168	306	560
		16	48	60	168	306	560
		20	48	60	168	306	560
		21	30	40	140	260	476
		25	48	60	168	306	560
		28	40	50	166	285	520
		30	30	40	140	260	476
		35	40	50	166	285	520
		40	48	60	168	306	560
		50	45	55	155	292	536
		70	40	50	166	285	520
		100	40	50	166	285	520
Max.kimenő nyomaték (Nm)	1, 2	3~100	A kimenő nyomaték háromszorosa				
Kotyanás (arc min)	1	3~10	≤ 10	≤ 10	≤ 10	≤ 10	≤ 10
	2	9~100	≤ 12	≤ 12	≤ 12	≤ 12	≤ 12
Bemeneti sebesség (rpm)	1	3, 4, 5	3300	3300	2600	2300	2200
	1	7, 10	4000	4000	2900	2700	2700
	2	12~40	4400	4400	3200	3000	3000
	2	50	4800	4800	3600	3300	3200
	2	70~100	5500	5500	4200	3900	3500
Súly (kg)	1	3~10	1.20	1.30	3.50	6.00	16.0
	2	9~100	1.40	1.60	4.50	7.20	20.0
Torziós merevség (Nm / arc min)	1, 2	3~100	5.00	7.00	11.0	27.0	48.0
Radiális terhelhetőség (N)			365	840	6000	7500	14000
Axiális terhelhetőség (N)			305	605	5000	3225	12000
Zaj (dB)			65	65	64	64	64
Élettartam (hrs)			20000				
Hőmérséklet (°C)			-15°C~+90°C				
Védettség			IP64				
Kenés			Szintetikus kenőanyag, ISO VG220				