
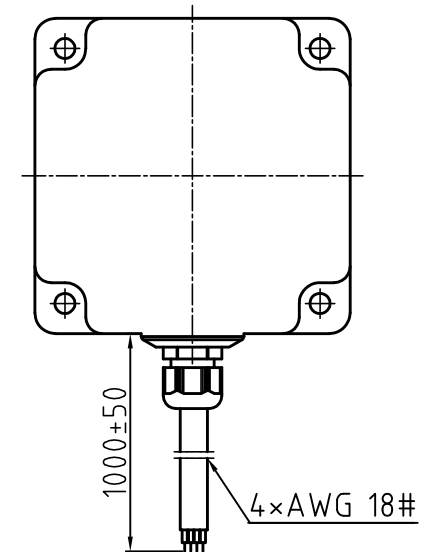
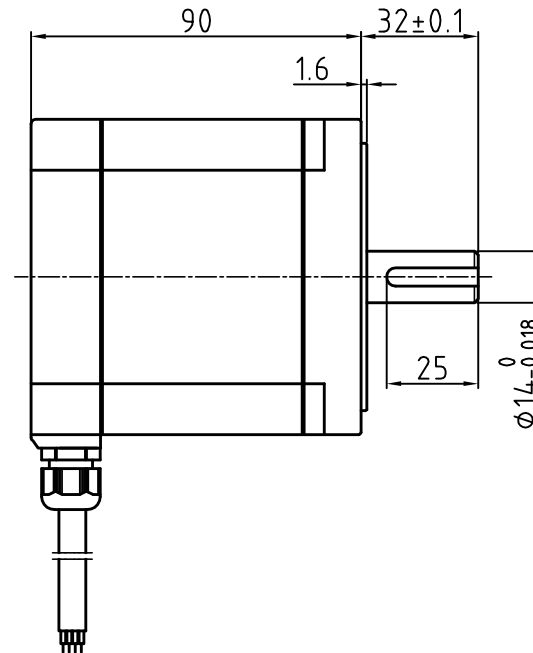


版本 Rev.	日期 Date	变更文件号 ECN NO.	变更内容 Revisions	设计 By
V0.1	17.11.8		Add Waterproof	王洪松

Dimension: (Unit: mm)

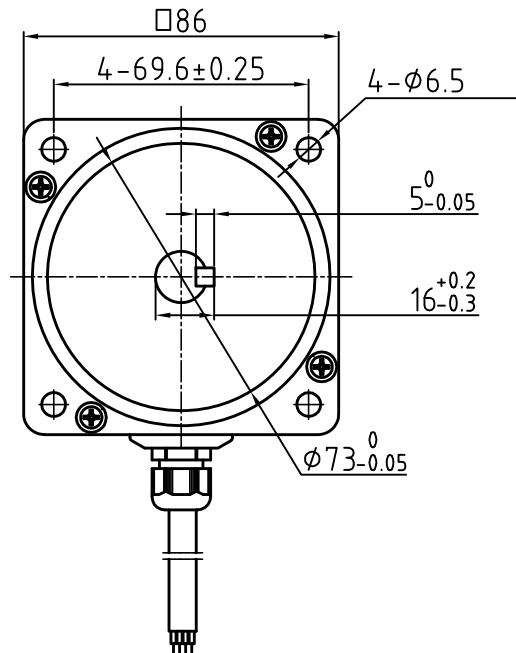


Common Rating

Step angle	1.8°
Position accuracy	1.8±0.09°
Dielectric strength	500VAC 1min
Insulation resistance	100MΩ(500VDC)
Insulation class	B
Protection	IP65
Temp rise(Max)	80K
Radial play	Max.0.02mm(Load 450g)
Axial play	Max.0.08mm(Load 900g)

Specification:

Current/phase	6.0 A
Voltage	3 V
DC Resistance/phase	0.36 Ω
Inductance/phase	2.5 mH
Holding torque	4.5N·M
Inertia	1.8 kg·cm ²
Weight	2.1 kg

Motor Connctions

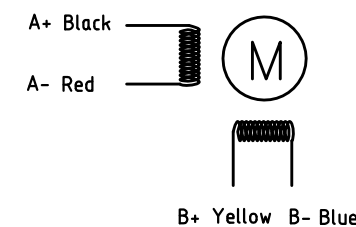

设计 Designed	王洪松	日期 Date	17.11.08	材料 Material	LEADSHINE TECHNOLOGY CO., LTD.
审核 Checked	刘佩峰	17.11.08	第一角画法 First Angle projection	名称 Title	Stepper Motor with IP65
批准 Approved	田天胜	17.11.08	重量Weight 比例Scale 阶段标记Stage Mark	86CM45-FS	
料号 Part No.			共 1 页 第 1 页 Sheet 1 of 1	图号 DWG. NO.	